AlturnaMATS®

OUTRIGGER PADS

Features...

- Safety textured
- Safety orange rope handles
- No splinters
- No warping
- No delamination
- Lightweight
- Recovery memory after bending

The Lightweight HEAVY DUTY Outrigger Pad!

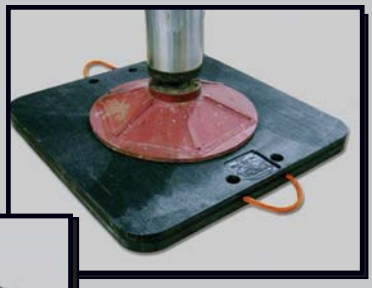

Many Standard Sizes

The only engineered, quantifiable and rated Outrigger pad available today.

AlturnaMats pads are engineered to bend but not break!

Stock Outrigger Pads

Model	Load Capacity Vertical	Load Capacity 45° Angle	Width	Length	Height	Weight	Sq. In.
PAD15151	45,000# (KG20,412)	20,000# (KG9,072)	15" (C38.1)	15" (C38.1)	1" (C2.54)	7.5# (KG3.40)	225 (CT1,451.70)
PAD18181	55,000# (KG24,948)	30,000# (KG13,608)	18" (C45.72)	18" (C345.72)	1" (C2.54)	11.0# (KG4.99)	324 (CT2,090.45)
PAD24241	60,000# (KG27,216)	35,000# (KG15,876)	24" (C60.96)	24" (C60.96)	1" (C2.54)	20.0# (KG9.07)	576 (CT3,761.35)
PAD24242	62,000# (KG28,123)	40,000# (KG18,144)	24" (C60.96)	24" (C60.96)	2" (C5.08)	38.0# (KG17.24)	576 (CT3,761.35)

Non-Stock Specialty Pads

PAD30301	81,000# (KG36,741)	41,000# (KG18,597.6)	30" (C76.2)	30" (C76.2)	1" (C2.54)	31.0# (KG14.06)	900 (CT5,806.8)
PAD36361	93,000# (KG42,184.8)	43,000# (KG19,504.8)	36" (C91.44)	36" (C91.44)	1" (C2.54)	45.0# (KG20.41)	1296 (CT8,361.79)
PAD48481	135,000# (KG61,236)	52,000# (KG23,587.2)	48" (C121.92)	48" (C121.92)	1" (C2.54)	80.0# (KG36.29)	2304 (CT14,865.4)
PAD30302	85,000# (KG38,556)	43,000# (KG19,504.8)	30" (C76.2)	30" (C76.2)	2" (C5.08)	62.0# (KG28.12)	900 (CT5,806.8)
PAD36362	98,000# (KG44,252.8)	45,000# (KG20,412)	36" (C91.44)	36" (C91.44)	2" (C5.08)	90.0# (KG40.83)	1296 (CT8,361.79)
PAD48482	140,000# (KG63,504)	55,000# (KG24,948)	48" (C121.92)	48" (C121.92)	2" (C5.08)	160.0# (KG72.58)	2304 (CT14,865.4)

*8"x10" Outrigger Leg applied under two separate conditions; 10,000# vertically and 10,000# with a 45 degree angle.
**Rope Handle located on width side of all pads. Pads 900 sq.in. or larger have two or more handles opposite each other.
Custom size pads available. Requires a minimum order. Lead time for non-stock items is 30-45 days.
KEY: C = Centimeters; KG = Kilograms; CT = Square Centimeters

• NOTICE •

- Foot pads must be smooth and have 80 sq. in. of surface.
- Muddy or loose soil conditions may require additional shoring or stacking of pads.
- Excessive flexing and/or bending may shorten the usable life of the pad.
- Acceptable operating temperature range is -40˚ to 180˚F.

"If you break it, we'll replace it"
Lifetime Guarantee

sales@alturnamats.com

PO Box 344 • Titusville, PA 16354
Toll Free: 888-544-6287 • Office: 814-827-8884
Fax 814-827-2903 • Toll Free Fax: 866-723-2903